





600x600mm VITRIFIED Tiles Collection






















600x600mm VITRIFIED Tiles Collection

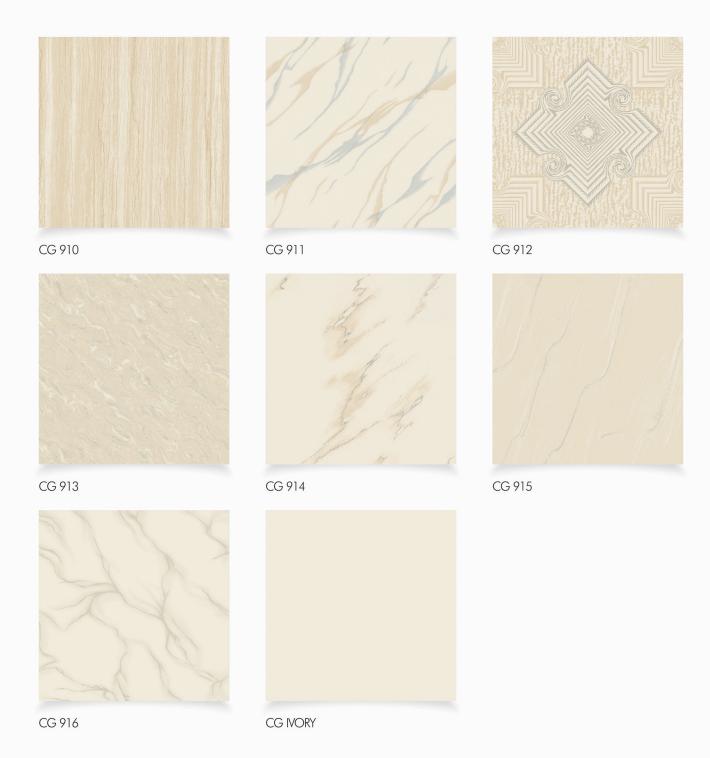



















Technical Specification

Vitrified Tiles 600 x 600 mm



Sr. No.	Characteristics	Standard as per ISO13006 / EN 176 Group Bla	Conor Vitrified value	Test Method
1.	Deviation in			
	Length & Widht	± 0.6%	± 0.1%	EN98
2.	Deviation in Thickness	± 0.5%	± 0.1%	EN 98
3.	Straightness of Side	± 0.5%	± 0.1%	EN 98
4.	Rectangularity	± 0.6%	± 0.2%	EN 98
5.	Surface Flatness (Curvature & Warpage)	± 0.5%	± 0.2%	EN 98
6.	Water Absorption	± 0.5%	± 0.05%	EN 99
7.	Moh's Hardness	> 6	> 8	EN 101
8.	Flexural Straingthness	> 27 N/mm²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	< 204 mm ³	< 144 mm ³	EN 102
10.	Skid Resistance (Friction Co-efficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength	1113 N	2830 N	ASTM C-648
12.	Density (g/cc)	>2	2.4	DIN 51082
13.	Frost Resistance	Frost Proof	Frost Proof	EN 202
14.	Chemical Resistance	No Damage	No Damage	EN 106
15.	Thermal Shock Resistance	No Damage	No Damage	EN 104
16.	Moisture Resistance	Nil	Nil	ISO 10545-10
17.	Glossiness	-	Min 65% - 70% Reflection	Glossmeter

PACKAGING DETAILS

Nominal Size	No. of Tiles	Coverage	Coverage
Trommar oizo	110. 01 11100	Area /Box (Approx.)	Area /Box (Approx.)
600 x 600 mm.	4 Pcs. / Box	15.50 Sq. Ft.	1.440 Sq. Mtr.

Note: Colours Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice.

APPLICATIONS





















coming soon.....

Wide Range Of GVT/PGVT

SUGAR FINISH
METALLIC SERIES
STONE & RUSTIC
ROTO / MICA SERIES

1200x800mm 800x800mm 1200x600mm 600x600mm



CONOR GRANITO PVT. LTD.

150p1, Halvad Road, Unchi Mandal Tal. & dist. Morbi - 363642 (Gujarat)

www.conorgranito.com
 Customer care: +91 98255 90083

Join us on : If 🖹 🔁 🥞 👫